

Stockholder Of Din Pn10 Threadolet, Copper Nickel Threadolets Exporter in India, Alloy 20 Threadolet Traders In India, ASTM A182 SS Threadolet, Alloy Steel Welding Outlets, Inconel 600 Threadolets

Stockist Of Stainless Steel Threadolets, Raised Faced Threadolet Dealer In India, Ansi B16.11 Threadolets, ASME B16.11 Threadolets, Asme B16.11 Class 150 Threadolet Dimension

Best Deal Of Duplex Steel Threadolet, Hastelloy C22 Threadolet, Alloy Steel Blind Threadolet, Nickel Alloy 200 Threadolet, Manufacturer Of Threadolet, Carbon Steel Threadolet, Mss Sp-97 Threadolet In India

**Threadolets** is the most popular branch connection: the branch is made by welding the item to the outlet of the run pipe. The ends of a **Threadolet** are bevelled to facilitate the welding process, and for this reason **Threadolet** belong to the family of butt weld fittings.

**Fivebros forgings Pvt LTD.** Is One Of The Largest **Manufacturer Of Threadolet in India.** **SS ASME B16.11 Threadolet** has excellent resistance to chloride-ion stress-corrosion cracking, and as well shows appropriate resistance to a number of oxidizing environments. **ANSI B16.11 Threadolet** is very much resistant to chemical corrosion and oxidation (corrosion resistant), and has some high stress-rupture effectiveness and low creep rates under high stresses at temperatures after suitable heat treatment. Our **ASTM A182 Threadolet** are accessible to our valuable customers in different range of diameters (d), wall thicknesses (w) and sizes (nom. Pipe Size) in customized form (as per customer requirement or order) and also at quite affordable rates (Best Price In India). Meanwhile, we offer different types of these fitting such as [We Manufacture And Supply Threadolet In Other Materials Like :] **Stainless Steel 304 Threadolet**, Inconel 625 Threadolet, **Carbon Steel Threadolet**, **Alloy Steel Threadolet**, etc.

ASME B16.9 Threadolet Manufacturers

### Standard Specification of Threadolet

**Dimensions :** ASME 16.11, MSS SP-97, BS 3799

**Size :** 1/2" to 24"

**Pressure Class :** 3000 LBS, 6000 LBS, 9000 LBS

**Form :** Welding Outlets, Welding Olets.

### What is Threadolet

**Threadolet** is the most popular branch connection: the branch is made by welding the item to the outlet of the run pipe. The ends of a **ASTM A105 Threadolet** are bevelled to facilitate the welding process, and for this reason **Threadolet** belong to the family of butt weld Fittings.

### Manufacturing Standards of Threadolet

**ASTM A182** – ASME SA182 – Standard Specification for Wrought Austenitic Stainless Steel Piping Fittings

**ASME B16.11** – Forged Fittings Socket – Welding and Threaded

**MSS SP-97** – Integrally Reinforced Forged Branch Threadolet – Socket Welding, Threaded and Buttwelding End

### Material & Grades of ASME B16.9 Threadolet :

#### Stainless Steel Threadolet :

ASTM A 182, A 240 F 304, 304L, 304H, 316, 316L, 316Ti, 310, 310S, 321, 321H, 317, 347, 347H, 904L

#### Duplex & Super Duplex Steel Threadolet :

ASTM / ASME A/SA 182 F 44, F 45, F 51, F 53, F 55, F 60, F 61

#### Carbon Steel Threadolet :

ASTM / ASME A/SA 105 ASTM / ASME A 350 , ASTM A 181 LF 2 / A516 Gr.70 A36, A694 F42, F46, F52, F60, F65, F706

#### Low Temperature Carbon Steel Threadolet : ASTM A350, LF2, LF3

#### Alloy Steel Threadolet :


ASTM / ASME A/SA 182 & A 387 F1, F5, F9, F11, F12, F22, F91

**Copper Alloy Steel Threadolet :** ASTM SB 61 , SB62 , SB151 , SB152 UNS No. C 70600 (Cu-Ni 90/10), C 71500 (Cu-Ni 70/30), UNS No. C 10100, 10200, 10300, 10800, 12000, 12200

**Nickel Alloy Threadolet :**

ASTM SB564, SB160, SB472, SB162 Nickel 200 (UNS No. N02200), Nickel 201 (UNS No. N02201), Monel 400 (UNS No. N04400), Monel 500 (UNS No. N05500), Inconel 800 (UNS No. N08800), Inconel 825 (UNS No. N08825), Inconel 600 (UNS No. N06600), Inconel 625 (UNS No. N06625), Inconel 601 (UNS No. N06601), Hastelloy C 276 (UNS No. N10276), Alloy 20 (UNS No. N08020)

**Threadolet Dimensions :**

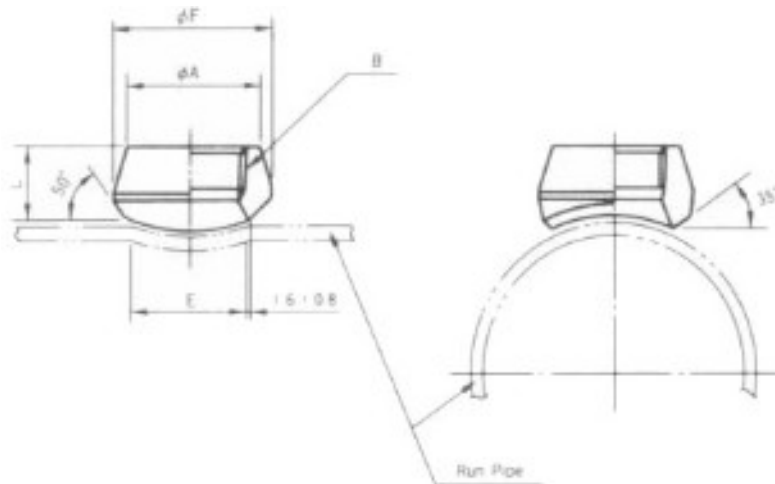

**Olets Branch Connection – Threadolet Dimensions**

Nominal Pipe Size	Face to Crotch (L)	
	3000 Lbs	6000 Lbs
1/8"	19	–
1/4"	19	–
3/8"	21	–
1/2"	25	32
3/4"	27	37
1"	33	40
1 1/4"	33	41
1 1/2"	35	43
2"	38	52
2 1/2"	46	–
3"	51	–
4"	57	–

**General notes:**

- Dimensions: Top Row in Inches / Bottom Row in millimeters.
- Root Gap - X - "Space" for welding the O'let is raised off the run pipe to establish proper weld gap by placing spacers, e.g. welding rods, under the fitting. This provides a uniform welding gap between the curvature of the run and base of fitting.
- $L$  = Dimensions Center Line of Run Pipe + X (Root Gap) + A (height of Threadolet).
- Bevelled Ends ASME B16.9 and B16.25.