

Stockholder Of Din Pn10 Flexolet Butt Weld, Copper Nickel Flexolet Butt Weld Exporter in India, Alloy 20 Flexolet Butt Weld Traders In India, ASTM A182 SS Flexolet Butt Weld, Alloy Steel Welding Outlets, Inconel 600 Flexolet Butt Weld

Stockist Of Stainless Steel Flexolet Butt Weld, Raised Faced Flexolet Butt Weld Dealer In India, Ansi B16.11 Flexolet Butt Weld, ASME B16.11 Flexolet Butt Weld, Asme B16.11 Class 150 Flexolet Butt Weld Dimension

Best Deal Of Duplex Steel Flexolet Butt Weld, Hastelloy C22 Flexolet Butt Weld, Alloy Steel Blind Flexolet Butt Weld, Nickel Alloy 200 Flexolet Butt Weld, Manufacturer Of Flexolet Butt Weld, Carbon Steel Flexolet Butt Weld, Mss Sp-97 Flexolet Butt Weld In India

Flexolet Butt Weld is the most popular branch connection: the branch is made by welding the item to the outlet of the run pipe. The ends of a **Flexolet Butt Weld** are bevelled to facilitate the welding process, and for this reason **Flexolet Butt Weld** belong to the family of butt weld fittings.

Fivebros forgings Pvt LTD. Is One Of The Largest **Manufacturer Of Flexolet Butt Weld in India.** **SS ASME B16.11 Flexolet Butt Weld** has excellent resistance to chloride-ion stress-corrosion cracking, and as well shows appropriate resistance to a number of oxidizing environments. **ANSI B16.11 Flexolet Butt Weld** is very much resistant to chemical corrosion and oxidation (corrosion resistant), and has some high stress-rupture effectiveness and low creep rates under high stresses at temperatures after suitable heat treatment. Our **ASTM A182 Flexolet Butt Weld** are accessible to our valuable customers in different range of diameters (d), wall thicknesses (w) and sizes (nom. Pipe Size) in customized form (as per customer requirement or order) and also at quite affordable rates (Best Price In India). Meanwhile, we offer different types of these fitting such as [We Manufacture And Supply Flexolet Butt Weld In Other Materials Like :] **Stainless Steel 304 Flexolet Butt Weld**, Inconel 625 Flexolet Butt Weld, **Carbon Steel Flexolet Butt Weld**, **Alloy Steel Flexolet Butt Weld**, etc.

ASME B16.9 Flexolet Butt Weld Manufacturers

Standard Specification of Flexolet Butt Weld

Dimensions : ASME 16.11, MSS SP-97, BS 3799

Size : 1/2" to 24"

Pressure Class : 3000 LBS, 6000 LBS, 9000 LBS

Form : Welding Outlets, Welding Olets.

What is Flexolet Butt Weld

Flexolet Butt Weld is the most popular branch connection: the branch is made by welding the item to the outlet of the run pipe. The ends of a **ASTM A105 Flexolet Butt Weld** are bevelled to facilitate the welding process, and for this reason **Flexolet Butt Weld** belong to the family of butt weld Fittings.

Manufacturing Standards of Flexolet Butt Weld

ASTM A182 – ASME SA182 – Standard Specification for Wrought Austenitic Stainless Steel Piping Fittings

ASME B16.11 – Forged Fittings Socket – Welding and Threaded

MSS SP-97 – Integrally Reinforced Forged Branch Flexolet Butt Weld – Socket Welding, Threaded and Buttwelding End

Material & Grades of ASME B16.9 Flexolet Butt Weld :

Stainless Steel Flexolet Butt Weld :

ASTM A 182, A 240 F 304, 304L, 304H, 316, 316L, 316Ti, 310, 310S, 321, 321H, 317, 347, 347H, 904L

Duplex & Super Duplex Steel Flexolet Butt Weld :

ASTM / ASME A/SA 182 F 44, F 45, F51, F 53, F 55, F 60, F 61

Carbon Steel Flexolet Butt Weld :

ASTM / ASME A/SA 105 ASTM / ASME A 350 , ASTM A 181 LF 2 / A516 Gr.70 A36, A694 F42, F46, F52, F60, F65, F706

Low Temperature Carbon Steel Flexolet Butt Weld : ASTM A350, LF2, LF3

Alloy Steel Flexolet Butt Weld :


ASTM / ASME A/SA 182 & A 387 F1, F5, F9, F11, F12, F22, F91

Copper Alloy Steel Flexolet Butt Weld : ASTM SB 61 , SB62 , SB151 , SB152 UNS No. C 70600 (Cu-Ni 90/10), C 71500 (Cu-Ni 70/30), UNS No. C 10100, 10200, 10300, 10800, 12000, 12200

Nickel Alloy Flexolet Butt Weld :

ASTM SB564, SB160, SB472, SB162 Nickel 200 (UNS No. N02200), Nickel 201 (UNS No. N02201), Monel 400 (UNS No. N04400), Monel 500 (UNS No. N05500), Inconel 800 (UNS No. N08800), Inconel 825 (UNS No. N08825), Inconel 600 (UNS No. N06600), Inconel 625 (UNS No. N06625), Inconel 601 (UNS No. N06601), Hastelloy C 276 (UNS No. N10276), Alloy 20 (UNS No. N08020)

Flexolet Butt Weld Dimensions:

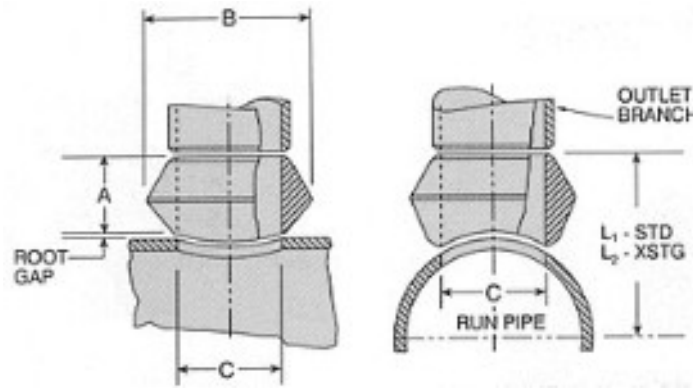

Olets Branch Connection – Flexolet Butt Weld Dimensions

	Outlet Size	Dimensions			Appx Weight
	Inches	A	B	C	Pounds
	3/8	3/4	1	0.493	0.10
	1/2	3/4	1 1/8	0.622	0.12
	3/4	7/8	1 1/2	0.824	0.22
	1	1 1/16	1 13/16	1.062	0.32
	1 1/4	1 1/4	2 1/4	1.38	0.64
	1 1/2	1 5/16	2 9/16	1.625	0.78
	2	1 1/2	3 5/16	2.313	1.14
	2 1/2	1 5/8	3 21/32	2.500	1.94
	3	1 3/4	4 9/32	3.125	2.60
	4	2	5 3/8	4.145	4.12
Standard	6	2 3/8	7 21/32	6.112	11

Extra Strong	Outlet Size	Dimensions			Appx Weight
	Inches	A	B	C	Pounds
	3/8	3/4	1	0.423	0.10
	1/2	3/4	1 1/8	0.546	0.12
	3/4	7/8	1 1/2	0.742	0.18
	1	1 1/16	2 13/16	1.062	0.36

1 1/4	1 1/4	2 1/4	1.278	0.55
1 1/2	1 5/16	2 9/16	1.625	0.68
2	1 1/2	3 5/16	2.313	1.24
2 1/2	1 5/8	3 21/32	2.500	2.26
3	1 3/4	4 9/32	3.125	2.84
4	2	5 3/8	4.145	4.56
6	3 1/16	7 23/32	5.800	15.00